

Method 2 - Vehicles without roof racks:

For vehicles without a roof rack (see figures 5 and 6 below), connect the left and right side strap hooks inside the car door jambs as shown. Remove the front and rear straps entirely. Some door jambs have more than one headliner piping or weather stripping. Place hook in the position of tightest and strongest fit. After placing the strap hooks inside the door jambs, SLOWLY close the car door to ensure there is ample room for the strap hook to fit in the closed door. Once the door is closed, try pulling up on the straps. If the hooks can be pulled out, it is not properly secured. Little or no hook should be visible once the door is shut.

Warning:

In-door hooks are not designed to attach to a vehicle's "rain gutter."

An improperly secured RoofPouch can fly off the vehicle, potentially causing damage to your goods and/or injury to others. Strap hooks will not securely fit inside ALL vehicle door jambs. Please be sure to thoroughly inspect for proper fit and attachment prior to use.

This RoofPouch is designed to fit most vehicles. However, there are some vehicles that will not accept the hooks into the door jambs. Not recommended for vehicles without frames around door windows.

If at any time you hear flapping, pull off the road as soon as it is safe to do so and check the straps. Always ensure that the straps securing the RoofPouch are tight.

"IN-DOOR HOOK STRAP" CONNECTION

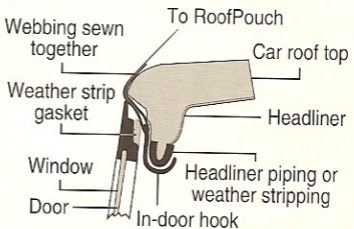


Fig. 5

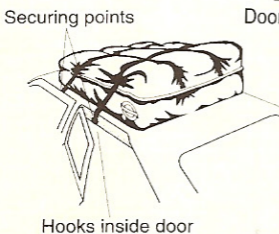


Fig. 6